

SUITABLE FOR SLIDING GATES UP TO 8 METRES









RESIDENTIAL SLIDE GATE OPENER

KEY FEATURES

SUITABLE FOR SLIDE GATES Suited for Slide Gates up to 8 metres

MYQ CAPABLE

Opener is myQ capable for gates with an additional purchase of Safety IR Beams & myQ Gateway.1

BATTERY BACKUP COMPATIBLE

Opener is Battery Backup compatible with additional purchase of Battery Backup accessory.2



Compliant to Australian and New Zealand Standard AS/NZS 60335.2.103





SMART



MYQ CAPABLE TECHNOLOGY lets users create schedules, monitor, receive alerts and control the gate opener away from home.



LCD DISPLAY for fast and intuitive programming setup.



SOFT-START AND SOFT-STOP for smooth operation.



SPEED ADJUSTMENT allows you to increase and decrease opening and closing gate speeds.



PEDESTRIAN MODE allows for customised gate opening access.

QUIET & RELIABLE



240V MAINS VOLTAGE



3-YEAR WARRANTY



IP44 WEATHER RESISTANT ingress protection IP44 suitable for outdoor installation.



QUIET DC MOTOR eliminates noise and vibrations, providing smooth operation.



BATTERY BACKUP ensures access even when the power is out.2

SLIDING GATES UP TO 8 METRES

SAFE & SECURE



SECURITY+ 2.0° sends a new code with every remote click.



PREMIUM AUTOMATIC SAFETY REVERSE function will allow your gate to stop and reverse automatically if obstructed in opening or closing.



TIMER-TO-CLOSE automatically closes the gate after a pre-set amount of time.³



IMPROVED TRANSMITTER RANGE has up to 18% better range meaning you can start opening your gate sooner.



AUTOMATIC FORCE SENSING monitors and adjusts the force needed to open your gate with each operation.



DISENGAGEMENT MECHANISM allows you to manually open the gate whenever needed.

ACCESSORIES INCLUDED



FOUR BUTTON REMOTE CONTROLS Premium remotes to control up to 4 garage doors or gates. Each button can be

programmed to Security+ and Security+ 2.0 devices.

POWERFUL ADD-ONS

E970M

M828AU772



GATE MYQ CONNECTIVITY BUNDLE

Add monitoring and control away from home. Includes myQ Gateway and The Outdoor Protector System (Safety IR Beams).



BATTERY BACKUP

Get in and out when the power's out with Battery Backup. Batteries fit within the housing of the opener.



WIRELESS SECURITY KEYPAD

Convenient and safe access to open and close your gate without using a remote control or key.



E-LOCK Additional security with electric lock.



MAG-LOCK Additional security with magnetic lock.

SLIDE GATE STOP Additional security for slide gates.

RACK Additional 1m racking.



FOUR BUTTON CAR VISOR REMOTE CONTROL

Easily attaches to your car visor to control up to 4 garage doors or gates. Can be programmed to Security+ and Security+ 2.0 devices.

gomerlin.com.au **■** gomerlin.co.nz

¹ Additional purchase of Merlin myQ Gateway and Safety IR Beams accessories required to enable myQ functionality. Visit gomerlin.com.au or gomerlin.co.nz for further information. ² Additional purchase of Merlin Battery Backup duccessory required to enable Battery Backup functionality. Visit gomerlin.com.au or gomerlin.co.nz for further information ⁵ Safety IR Beams must be installed to enable the use of Timer-to-Close. See User Guide for additional information. ⁴When compared to other available products.

SLIDE GATE OPENER MAINS VOLTAGE KIT - MGSK600











RESIDENTIAL SLIDE GATE OPENER

Start with smart. Compatible with myQ²

Additional purchase of The Outdoor Protector System and myQ Gateway is required

FOR SLIDING GATES

- · Monitor and control your gate away from home through the myQ App.
- · Peace of mind knowing if gate is open or closed anywhere and any time.
- Receive real time alerts and notifications so you know when the gate is opened or closed by loved ones.

APP AVAILABLE ON:








- · See history records of your gate open and close periods.
- Protect your loved ones and belongings with The Outdoor Protector System (Safety IR Beams).
- Compatible myQ App available for smart devices including Apple Watch.

TYPICAL INSTALLATION - SLIDE GATES

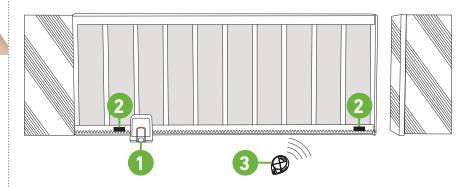

- 1. Gate Opener (MGS600)
- 2. Limit Switch Brackets
- 3. Remote Control
- Maximum Weight for single gate: 600kg
- Maximum Width for single gate: 8m



SECURITY+ 2.0®

- Encrypted rolling code across multiple frequencies.
- · Security+ 2.0® technology virtually eliminates interference.





RADIO

- Provides 2-way communication from gate openers and accessories.
- · Receiver with 64 memory register.

STANDARD SPECIFICATIONS

- · Main AC Supply: 220-240Vac: 50/60Hz
- Motor Voltage: 24 VDC
- Input Power: 120 W
- Ambient Temperature Range: -20-+55*C
- Max peak pulling force: 18 Nm
- Radio frequency: 433.30, 433.92, 434.54 MHz with Security+ 2.0 technology
- · Compatible with myQ Technology¹
- Gate Opener Capacity of up to 64 memory registers





AUSTRALIA

Chamberlain Australia Pty Ltd PO Box 1446 Lane Cove NSW 1595 Australia

gomerlin.com.au 1800 638 234

NEW ZEALAND

Chamberlain New Zealand Ltd P0 Box 100-221 North Shore Auckland 0745 New Zealand

gomerlin.co.nz 0800 653 667

Engineered and designed by The Chamberlain Group, Inc. ©2021 The Chamberlain Group, Inc.™ Trademark of The Chamberlain Group, Inc. ® Registered Trademark of The Chamberlain Group, Inc.



This feature requires monitored Safety IR Beams to be fitted. Linking your myQ account to partner may require an additional accessory purchase or subscription fee. Apple, the Apple logo, iPhone, and iPad are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC.